

This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	19/03/17	19/03/17

1 Electrical

1.1 Impedence

50 Ω

1.2 Frequency

DC ~50GHz

1.3 VSWR

1.15:1

2 Materials&plating

2.1 Body:

Stainless Steel; Passivated

2.2 Insulator:

Pei


2.3 Contact Pin:

Beryllium-copper, gold plated

2.4 Nut:

Stainless Steel; Passivated

2.4 Male

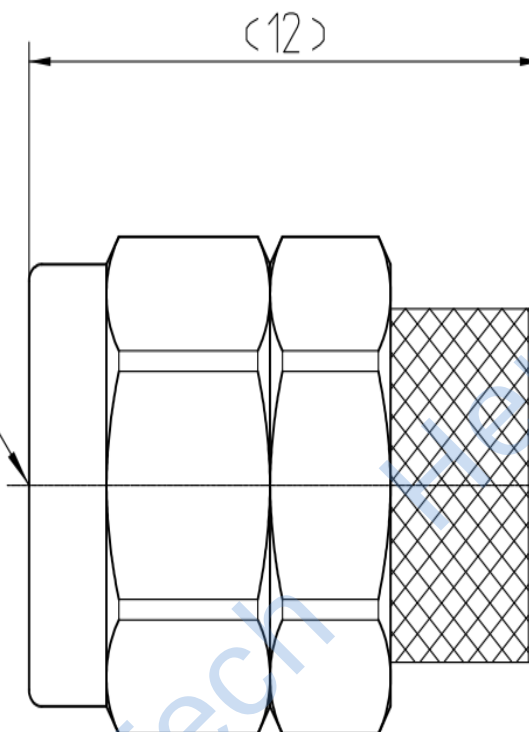

Tel:Lee13890694956

Web:www.hltchips.com

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME

2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17
ENGINEER: L.yu 19/03/17
APPROVED: W.yi 19/03/17
TOLERANCES UNLESS OTHERWISE SPECIFIED
X ±0.50
.X ±0.20
.XX ±0.10
ANGLES ±1°

TITLE:
RF Termination
2.4mm Male Conn.Termination

PART NO: HL-2.4-50JRG-0.5



DIMENSION IN MILLIMETERS (mm)

SIZE: A4 SCALE: N/A SHEET: 1/1 REV: A